




CIR115A

Contact Smart Card Reader

CIR115A Contact Smart Card Reader is a compact contact smart card reader with powerful core and modern design to bring about fast and secure data transmission for various smart card applications, such as access control, e-government, e-healthcare and network log-on.

- Supports ISO7816 Part 1/2/3/4 standard
- Supports full-sized ISO7816 Class A/ B/ C cards with T=0 or T=1 protocol and memory cards
- Supports extended APDU
- Complies with CCID standard
- Conforms to PC/SC specifications
- Works on different operating systems
- Optional connector types: USB A or USB C

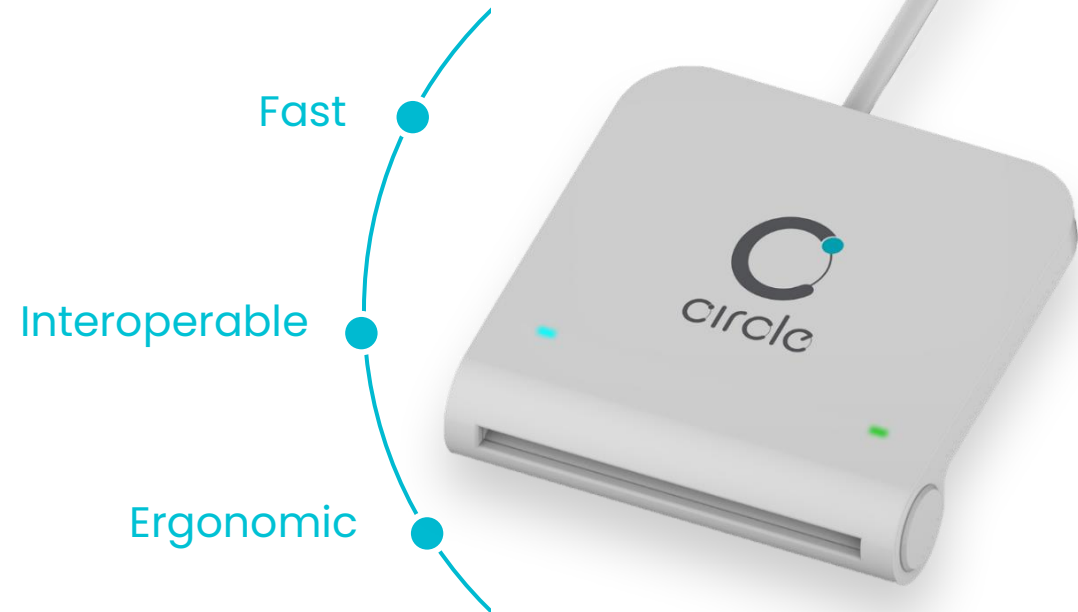



CIR115A

Contact Smart Card Reader

Contact Smart Card Interface

Standard	ISO/IEC 7816 Part 1/2/3/4
Protocol	T=0, T=1, Memory card
Supported Card Types	ISO7816 Class A/ B/ C (5V/ 3V/ 1.8V) cards, Memory cards
Supported Card Size	ID-1 (Full size)
Supply Current	55mA in Class A/ B/ C
Speed	9.6 – 826 Kbps
Short Circuit Protection	Support
Clock Frequency	Up to 16MHz (Default: 4.8MHz)
Card Connector	Sliding, Min. 100,000 insertion cycles
Extended APDU	Support

Physical Characteristics

Dimensions	66.0mm (L) x 66.0mm (W) x 9.3mm (H)
Weight	48.3g (± 5 g)
Casing	White and Grey ABS

Host Interface

Power Supply	USB Bus-powered
Current Consumption	<100 mA (Operating), <2mA (Standby)
USB Standard	USB 2.0 Full Speed (12 Mbps)
USB Connector Type	Default: Type A Optional: Type C
USB Cable	1m

Human Interface

LED	2 LEDs: 1 Blue (Operation Status), 1 Green (Power)
-----	----------------------------------------------------

Software and Driver

Driver	CCID
Application	PC/SC
Programming Interface (API)	

Operating Conditions

Operating Temperature	0 – 65 °C
Operating Humidity	Max. 95% (non-condensing)
Storage Temperature	-10 – 70 °C
Meantime Between Failure (MTBF)	600,000 hours

Compliance/ Certifications

Standards/ Systems	ISO/IEC7816, USB 2.0 Full Speed, CCID, Microsoft® WHQL
Regulatory/ Environmental	EN 60950/IEC 60950, CE, FCC, VCCI, RoHS3, REACH

Operational Environment

Supported Operating Systems	Windows® 7 SP1 and above, Linux®, Mac OS® 10.12 and above, Android™ 6.0 and above
-----------------------------	--------------------------------------------------------------------------------------

Ordering Information

Product Code	CIR115A-01: USB Type A Connector, CIR115A-02: USB Type C Connector (Optional)
--------------	----------------------------------------------------------------------------------

Fulcrum Biometrics Southern Africa

Block A, Regent Hill Office Park,
Corner Leslie & Turley Roads,
Lonehill, 2191, Sandton,
Gauteng, South Africa
+27 (0)11 702 8550
sales@fulcrumbiometrics.co.za
www.fulcrumbiometrics.co.za

